

Modeling the Potential Reduction of Stormwater Runoff Using BMPs

Brian E. Whitman

Associate Professor of Environmental Engineering
Environmental Engineering and Earth Sciences Department
Wilkes University

Managing Stormwater in Our Communities
College Misericordia
Dallas, Pennsylvania
May 31, 2007


Stormwater Management Study for Wilkes University Utilizing Best Management Practices

Senior Project by:
Rebecca Calimer
Joshua Shoff

September 2005 through May 2006


Stormwater Problems Associated with Developed Environments

Disturbs the Natural Hydrologic Cycle



Stormwater Problems Associated with Developed Environments

- Frequency of flooding increases
 - Stream Bank Erosion
 - Undercutting
 - Channel Widening



Project Objectives


- Create a Stormwater Management Plan for the main block of Wilkes University Campus using Best Management Practices (BMPs)
 - Eliminate stormwater runoff for small, frequently occurring rain events by using available space
 - Reduce peak flow of larger storm events
- Develop a Stormwater Model for the Study Area
 - Compare design alternatives to current runoff conditions

Study Area



Modeling Software


- Create model of study area using PondPack
 - Bentley Systems, Inc.
 - Detention Pond Design and Urban Modeling Computer Software



General Model Inputs

- Soil Conservation Service (SCS) Curve Number (CN) Method (TR-55)
 - CN
 - Land use
 - Hydrologic Soil Group (HSG)
 - Area
 - Time of Concentration – TR-55 Sheet Flow
 - Hydraulic length
 - Mannings number for surface flow
 - Unitless Slope
 - Depth of precipitation for 2-yr, 24-hour storm event

Distribution of Total Rainfall per Year by Rain Event

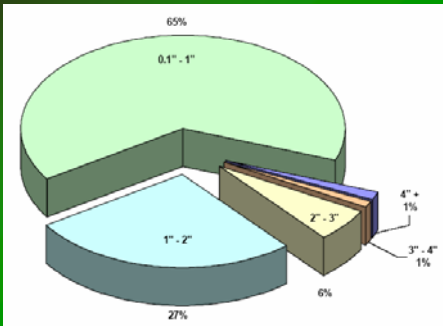

PA State Climatological Office (1926-2003)

Rainfall Criteria for Model

- Develop a Stormwater Management Plan to Minimize the Runoff from a 3-inch Rain Event (24 hours)
- Accounts for 98% of the storm events that occur during the year



BMP Design



- Estimate runoff volumes and peak rates from the Current Conditions Model
- Place BMP based on the available area for campus
- Design according to PA Stormwater Best Management Practices Manual (Jan 2005)




Green Roof Technology




Infiltration Trench/Bed

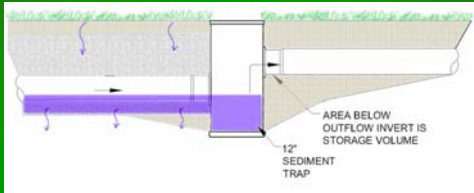



Infiltration Well

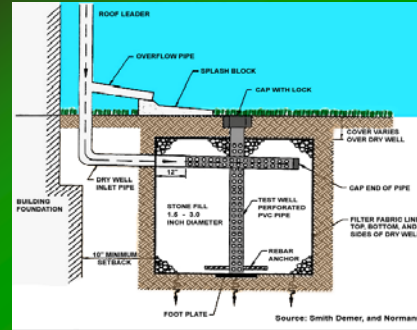

Bio-retention Garden

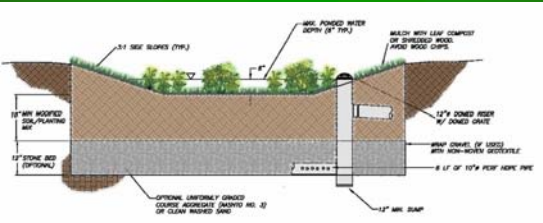


Vegetated Swale

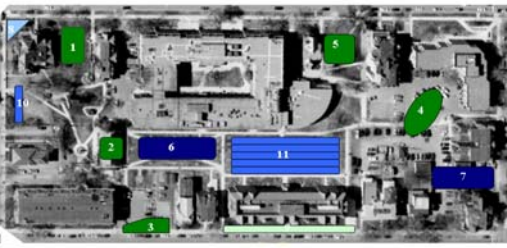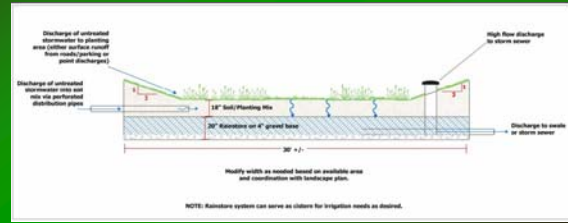


- 1. Bio-Garden 1
- 2. Bio-Garden 2
- 3. Bio-Garden 3
- 4. Bio-Garden 4
- 5. Bio-Garden 5
- 6. Infiltration Bed 1
- 7. Infiltration Bed 2
- 8. Infiltration Well
- 9. Vegetated Swale
- 10. Infiltration Trench 1
- 11. Infiltration Trench 2

*not drawn to scale


Model Hydrograph: Total Area for a 3-inch Storm Event

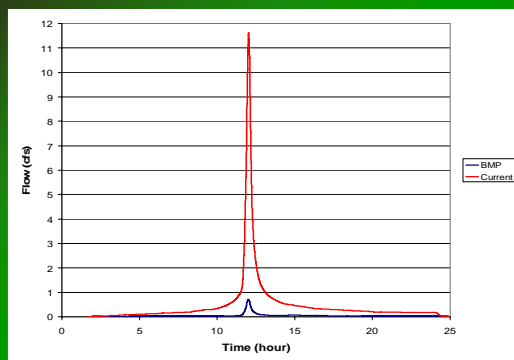


Total Area Peak Flow with and without BMPs

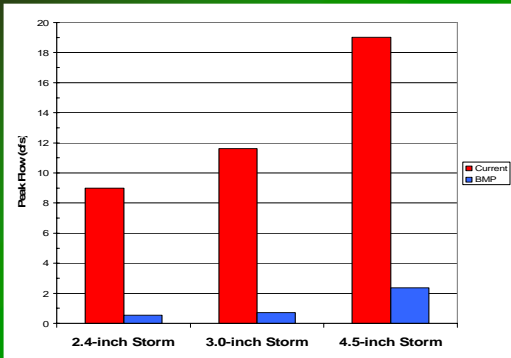


Total Area Runoff Volume with and without BMPs

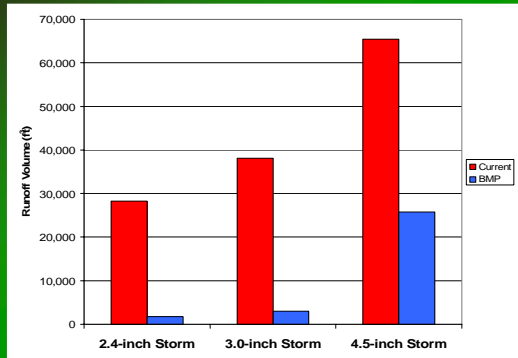


Peak Flow from Buildings with a Green Roof

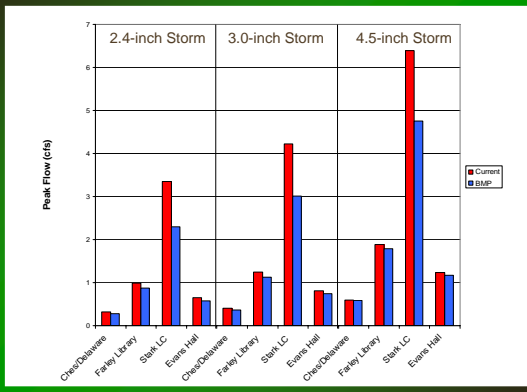


Runoff Volume from Buildings with a Green Roof

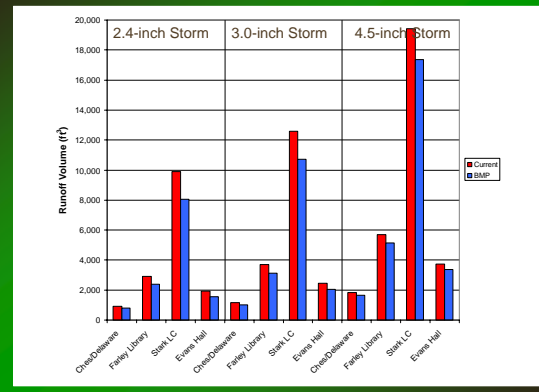


Peak Flow for a 3.0-inch Storm Event

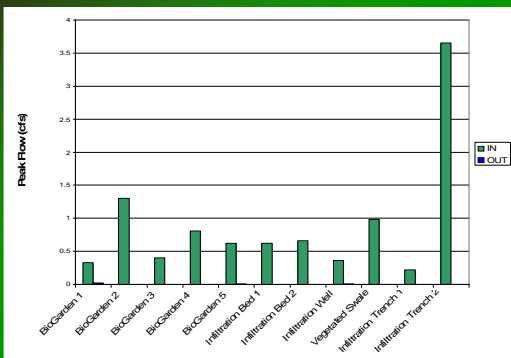


Runoff Volume for a 3.0-inch Storm Event

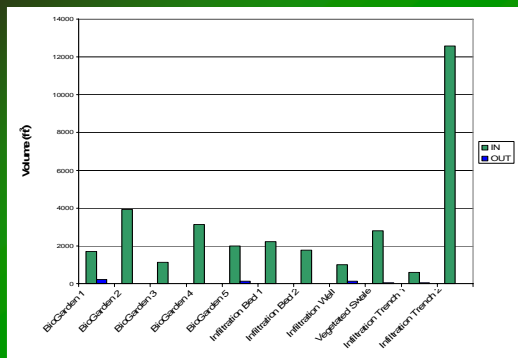

Peak Flow for a 4.5-inch Storm Event

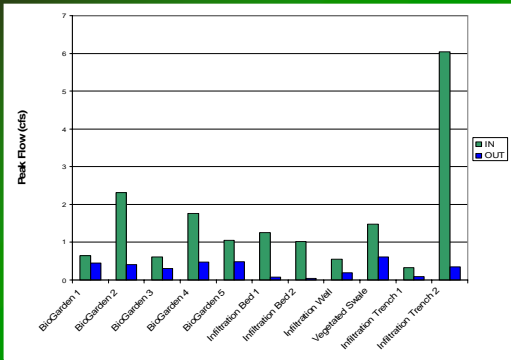

Runoff Volume for a 4.5-inch Storm Event

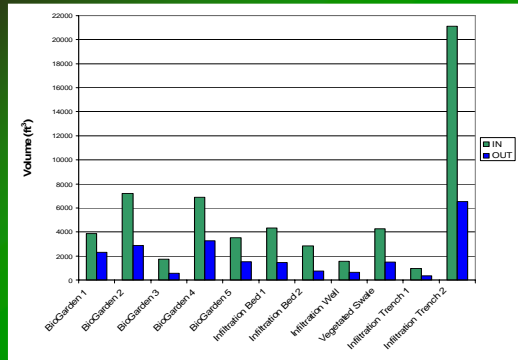

Project Conclusions and Final Thoughts

- BMPs can be implemented on the Wilkes University Campus with minimal loss of open space
- The 3.0-inch storm event (24 hour) was completely infiltrated in areas where in-ground BMPs could be placed
- The peak flow and runoff volume for a larger storm event can be reduced
- Model needs to be calibrated and verified
- BMPs could be effective if systematically and strategically placed